



Auxiliary
contactor
BG09

Product designation

Product type designation

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min max	Hz Hz 25 400
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$) AC-1 ($\leq 55^\circ\text{C}$) AC-1 ($\leq 70^\circ\text{C}$) AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) AC-4 (400V)	A A A A A 20 18 15 9 4
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V 400V 500V 690V	kW kW kW kW 8 14 16 22
Short-time allowable current for 10s (IEC/EN60947-1)	A	96
Protection fuse	gG (IEC) aM (IEC)	A A 20 10
Making capacity (RMS value)	A	92
Breaking capacity at voltage	440V 500V 690V	A A A 72 72 72
Resistance per pole (average value)	m Ω	10
Power dissipation per pole (average value)	I_{th} AC-3	W W 4 0.8
Tightening torque for terminals	min max min max	Nm Nm lbin lbin 0.8 1 9 9
Tightening torque for coil terminal	min max min max	Nm Nm lbin lbin 0.8 1 9 9
Max number of wires simultaneously connectable	Nr.	2

Conductor section				
AWG/Kcmil				
		max		12
Flexible w/o lug conductor section				
		min	mm ²	0.8
		max	mm ²	2.5
Flexible c/w lug conductor section				
		min	mm ²	1.5
		max	mm ²	2.5
Flexible with insulated spade lug conductor section				
		min	mm ²	1.5
		max	mm ²	2.5
Power terminal protection according to IEC/EN 60529				IP20
Mechanical features				
Operating position				
		normal allowable		Vertical plan ±30°
Fixing				Screw / DIN rail 35mm
Weight			g	200
Auxiliary contact characteristics				
Thermal current I _{th}			A	10
Operations				
Mechanical life			cycles	20000000
Electrical life			cycles	500000
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
		rated load	cycles	500000
		mechanical load	cycles	20000000
EMC compatibility				YES
DC coil operating				
DC rated control voltage			V	24
DC operating voltage				
pick-up		min	%U _s	75
		max	%U _s	115
drop-out		min	%U _s	10
		max	%U _s	25
Average coil consumption ≤20°C				
		in-rush	W	3.2
		holding	W	3.2
Max cycles frequency				
Mechanical operation			cycles/h	3600
Operating times				
Average time for U _s control				
in AC		Closing NO		
		min	ms	12
		max	ms	21
		Opening NO		
		min	ms	9
		max	ms	18

in DC	Closing NC	min	ms	17
		max	ms	26
	Opening NC	min	ms	7
		max	ms	17
	Closing NO	min	ms	18
		max	ms	25
	Opening NO	min	ms	2
		max	ms	3
	Closing NC	min	ms	3
		max	ms	5
	Opening NC	min	ms	11
		max	ms	17

UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Full-load current (FLA) for three-phase AC motor	at 480V	A	7.6
	at 600V	A	6.1

Yielded mechanical performance	for single-phase AC motor	110/120V	HP	0.5
		230V	HP	1.5
	for three-phase AC motor	200/208V	HP	2
		220/230V	HP	3
		460/480V	HP	5
		575/600V	HP	5

General USE	Contactor	AC current	A	20
-------------	-----------	------------	---	----



Ambient conditions

Temperature	Operating temperature	min	°C	-50
		max	°C	+70
	Storage temperature	min	°C	-60
		max	°C	+80
	Max altitude	m	3000	


Resistance & Protection

Pollution degree	3
------------------	---

Dimensions

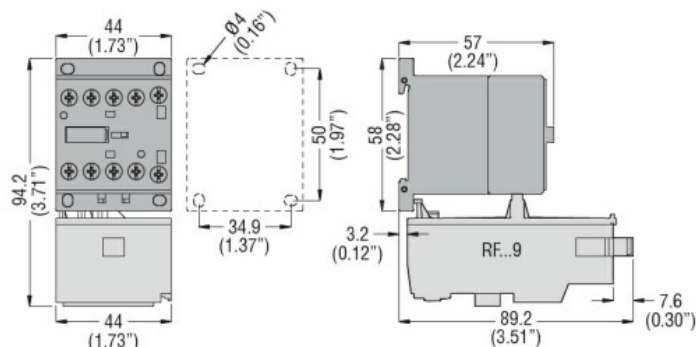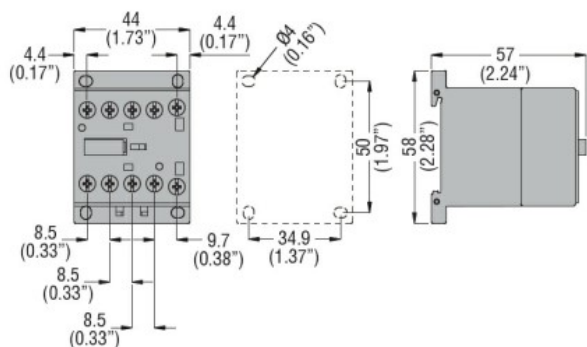

Wiring diagrams

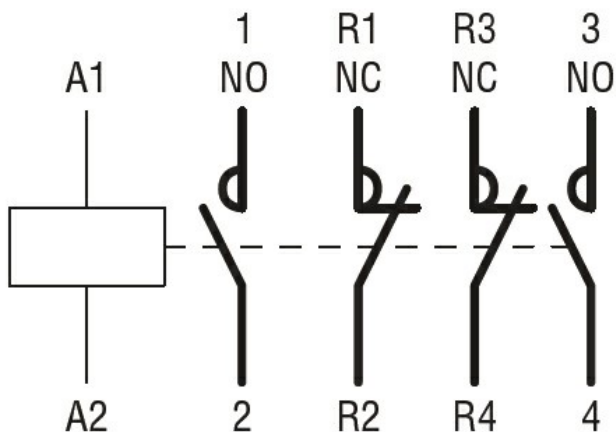

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching