



Product designation

Product type designation

Auxiliary  
contactor  
BG09



**Contact characteristics**

|                                                                                |                                                    |        |
|--------------------------------------------------------------------------------|----------------------------------------------------|--------|
| Number of poles                                                                | Nr.                                                | 4      |
| Rated insulation voltage $U_i$ IEC/EN                                          | V                                                  | 690    |
| Rated impulse withstand voltage $U_{imp}$                                      | kV                                                 | 6      |
| Operational frequency                                                          | min                                                | Hz 25  |
|                                                                                | max                                                | Hz 400 |
| IEC Conventional free air thermal current $I_{th}$                             | A                                                  | 20     |
| Operational current $I_e$                                                      | AC-1 ( $\leq 40^\circ\text{C}$ )                   | A 20   |
|                                                                                | AC-1 ( $\leq 55^\circ\text{C}$ )                   | A 18   |
|                                                                                | AC-1 ( $\leq 70^\circ\text{C}$ )                   | A 15   |
|                                                                                | AC-3 ( $\leq 440\text{V } \leq 55^\circ\text{C}$ ) | A 9    |
|                                                                                | AC-4 (400V)                                        | A 4    |
| Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )                     | 230V                                               | kW 8   |
|                                                                                | 400V                                               | kW 14  |
|                                                                                | 500V                                               | kW 16  |
|                                                                                | 690V                                               | kW 22  |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$                                  | A 12   |
|                                                                                | 48V                                                | A 10   |
|                                                                                | 75V                                                | A 4    |
|                                                                                | 110V                                               | A 3    |
|                                                                                | 220V                                               | A –    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$                                  | A 15   |
|                                                                                | 48V                                                | A 14   |
|                                                                                | 75V                                                | A 9    |
|                                                                                | 110V                                               | A 8    |
|                                                                                | 220V                                               | A –    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$                                  | A 16   |
|                                                                                | 48V                                                | A 16   |
|                                                                                | 75V                                                | A 10   |
|                                                                                | 110V                                               | A 10   |
|                                                                                | 220V                                               | A 2    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series | $\leq 24\text{V}$                                  | A 16   |
|                                                                                | 48V                                                | A 16   |
|                                                                                | 75V                                                | A 10   |
|                                                                                | 110V                                               | A 10   |
|                                                                                | 220V                                               | A 2    |


|                                                                                     |                   |                 |     |
|-------------------------------------------------------------------------------------|-------------------|-----------------|-----|
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series |                   |                 |     |
|                                                                                     | $\leq 24\text{V}$ | A               | 7   |
|                                                                                     | 48V               | A               | 6   |
|                                                                                     | 75V               | A               | 2   |
|                                                                                     | 110V              | A               | 1   |
|                                                                                     | 220V              | A               | –   |
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series |                   |                 |     |
|                                                                                     | $\leq 24\text{V}$ | A               | 8   |
|                                                                                     | 48V               | A               | 8   |
|                                                                                     | 75V               | A               | 5   |
|                                                                                     | 110V              | A               | 4   |
|                                                                                     | 220V              | A               | –   |
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series |                   |                 |     |
|                                                                                     | $\leq 24\text{V}$ | A               | 10  |
|                                                                                     | 48V               | A               | 10  |
|                                                                                     | 75V               | A               | 6   |
|                                                                                     | 110V              | A               | 5   |
|                                                                                     | 220V              | A               | 0,8 |
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series |                   |                 |     |
|                                                                                     | $\leq 24\text{V}$ | A               | 10  |
|                                                                                     | 48V               | A               | 10  |
|                                                                                     | 75V               | A               | 6   |
|                                                                                     | 110V              | A               | 5   |
|                                                                                     | 220V              | A               | 0,8 |
| Short-time allowable current for 10s (IEC/EN60947-1)                                |                   | A               | 96  |
| Protection fuse                                                                     |                   |                 |     |
|                                                                                     | gG (IEC)          | A               | 20  |
|                                                                                     | aM (IEC)          | A               | 10  |
| Making capacity (RMS value)                                                         |                   | A               | 92  |
| Breaking capacity at voltage                                                        |                   |                 |     |
|                                                                                     | 440V              | A               | 72  |
|                                                                                     | 500V              | A               | 72  |
|                                                                                     | 690V              | A               | 72  |
| Resistance per pole (average value)                                                 |                   | m $\Omega$      | 10  |
| Power dissipation per pole (average value)                                          |                   |                 |     |
|                                                                                     | $I_{th}$          | W               | 4   |
|                                                                                     | AC-3              | W               | 0.8 |
| Tightening torque for terminals                                                     |                   |                 |     |
|                                                                                     | min               | Nm              | 0.8 |
|                                                                                     | max               | Nm              | 1   |
|                                                                                     | min               | Ibin            | 9   |
|                                                                                     | max               | Ibin            | 9   |
| Tightening torque for coil terminal                                                 |                   |                 |     |
|                                                                                     | min               | Nm              | 0.8 |
|                                                                                     | max               | Nm              | 1   |
|                                                                                     | min               | Ibin            | 9   |
|                                                                                     | max               | Ibin            | 9   |
| Max number of wires simultaneously connectable                                      |                   | Nr.             | 2   |
| Conductor section                                                                   |                   |                 |     |
| AWG/Kcmil                                                                           |                   |                 |     |
|                                                                                     | max               |                 | 12  |
| Flexible w/o lug conductor section                                                  |                   |                 |     |
|                                                                                     | min               | mm <sup>2</sup> | 0.8 |

|                                                     |  |                            |                    |          |
|-----------------------------------------------------|--|----------------------------|--------------------|----------|
|                                                     |  | max                        | mm <sup>2</sup>    | 2.5      |
| Flexible c/w lug conductor section                  |  | min                        | mm <sup>2</sup>    | 1.5      |
|                                                     |  | max                        | mm <sup>2</sup>    | 2.5      |
| Flexible with insulated spade lug conductor section |  | min                        | mm <sup>2</sup>    | 1.5      |
|                                                     |  | max                        | mm <sup>2</sup>    | 2.5      |
| Power terminal protection according to IEC/EN 60529 |  |                            |                    | IP20     |
| Mechanical features                                 |  |                            |                    |          |
| Operating position                                  |  | normal allowable           | Vertical plan ±30° |          |
| Fixing                                              |  | Screw / DIN rail 35mm      |                    |          |
| Weight                                              |  |                            | g                  | 200      |
| Auxiliary contact characteristics                   |  |                            |                    |          |
| Thermal current I <sub>th</sub>                     |  |                            | A                  | 10       |
| IEC/EN 60947-5-1 designation                        |  | Q600                       |                    |          |
| Operations                                          |  |                            |                    |          |
| Mechanical life                                     |  |                            | cycles             | 20000000 |
| Electrical life                                     |  |                            | cycles             | 500000   |
| Safety related data                                 |  |                            |                    |          |
| Performance level B10d according to EN/ISO 13489-1  |  | rated load mechanical load | cycles             | 500000   |
|                                                     |  |                            | cycles             | 20000000 |
| EMC compatibility                                   |  | YES                        |                    |          |
| DC coil operating                                   |  |                            |                    |          |
| DC rated control voltage                            |  |                            | V                  | 48       |
| DC operating voltage                                |  |                            |                    |          |
| pick-up                                             |  | min                        | %U <sub>s</sub>    | 75       |
|                                                     |  | max                        | %U <sub>s</sub>    | 115      |
| drop-out                                            |  | min                        | %U <sub>s</sub>    | 10       |
|                                                     |  | max                        | %U <sub>s</sub>    | 25       |
| Average coil consumption ≤20°C                      |  | in-rush holding            | W                  | 3.2      |
|                                                     |  |                            | W                  | 3.2      |
| Max cycles frequency                                |  |                            |                    |          |
| Mechanical operation                                |  |                            | cycles/h           | 3600     |
| Operating times                                     |  |                            |                    |          |
| Average time for U <sub>s</sub> control in AC       |  |                            |                    |          |
| Closing NO                                          |  | min                        | ms                 | 12       |
|                                                     |  | max                        | ms                 | 21       |
| Opening NO                                          |  | min                        | ms                 | 9        |
|                                                     |  | max                        | ms                 | 18       |
| Closing NC                                          |  | min                        | ms                 | 17       |
|                                                     |  | max                        | ms                 | 26       |
| Opening NC                                          |  | min                        | ms                 | 7        |

|                                                  |  |     |    |      |
|--------------------------------------------------|--|-----|----|------|
|                                                  |  | max | ms | 17   |
| in DC                                            |  |     |    |      |
| Closing NO                                       |  | min | ms | 18   |
|                                                  |  | max | ms | 25   |
| Opening NO                                       |  | min | ms | 2    |
|                                                  |  | max | ms | 3    |
| Closing NC                                       |  | min | ms | 3    |
|                                                  |  | max | ms | 5    |
| Opening NC                                       |  | min | ms | 11   |
|                                                  |  | max | ms | 17   |
| UL technical data                                |  |     |    |      |
| Rated operational voltage AC (UL)                |  |     | V  | 600  |
| Full-load current (FLA) for three-phase AC motor |  |     |    |      |
| at 480V                                          |  |     | A  | 7.6  |
| at 600V                                          |  |     | A  | 6.1  |
| Yielded mechanical performance                   |  |     |    |      |
| for single-phase AC motor                        |  |     |    |      |
| 110/120V                                         |  |     | HP | 0.5  |
| 230V                                             |  |     | HP | 1.5  |
| for three-phase AC motor                         |  |     |    |      |
| 200/208V                                         |  |     | HP | 2    |
| 220/230V                                         |  |     | HP | 3    |
| 460/480V                                         |  |     | HP | 5    |
| 575/600V                                         |  |     | HP | 5    |
| General USE                                      |  |     |    |      |
| Contactor                                        |  |     |    |      |
| AC current                                       |  |     | A  | 20   |
| Short-circuit protection fuse, 600V              |  |     |    |      |
| High fault                                       |  |     |    |      |
| Short circuit current                            |  |     | kA | 100  |
| Fuse rating                                      |  |     | A  | 30   |
| Fuse class                                       |  |     |    | J    |
| Standard fault                                   |  |     |    |      |
| Short circuit current                            |  |     | kA | 5    |
| Fuse rating                                      |  |     | A  | 30   |
| Fuse class                                       |  |     |    | RK5  |
| Ambient conditions                               |  |     |    |      |
| Temperature                                      |  |     |    |      |
| Operating temperature                            |  |     |    |      |
| min                                              |  |     | °C | -50  |
| max                                              |  |     | °C | +70  |
| Storage temperature                              |  |     |    |      |
| min                                              |  |     | °C | -60  |
| max                                              |  |     | °C | +80  |
| Max altitude                                     |  |     | m  | 3000 |
| Resistance & Protection                          |  |     |    |      |
| Pollution degree                                 |  |     |    | 3    |
| Dimensions                                       |  |     |    |      |

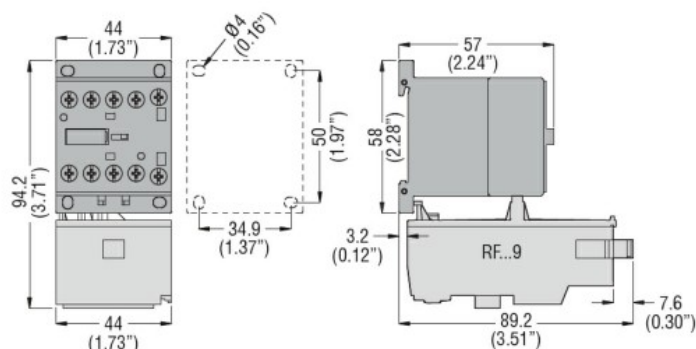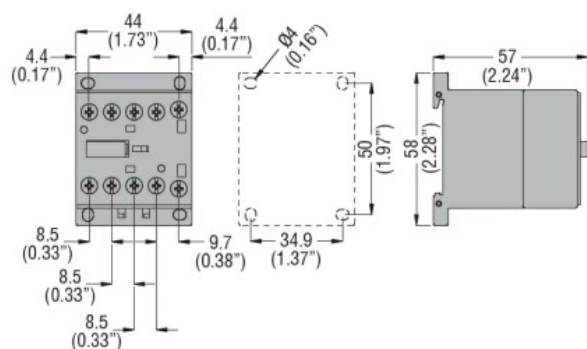

## Wiring diagrams

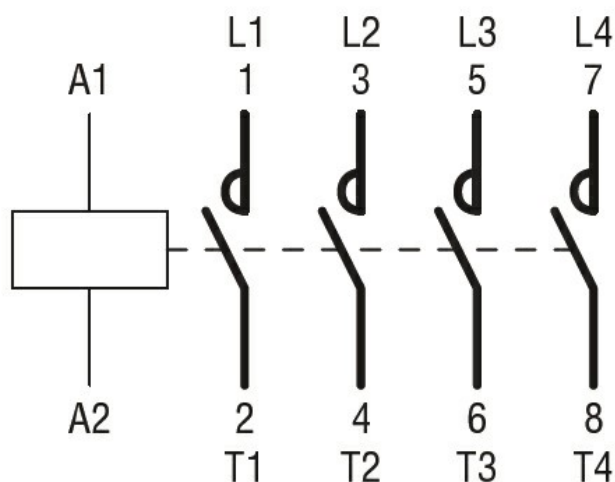

## Certifications and compliance

### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

### Certificates

CCC

cULus

EAC

## ETIM classification

### ETIM 8.0

EC000066 -  
Power contactor,  
AC switching