



Mechanical features

Fixing Front centre mounting


Auxiliary contact characteristics

Type of contact 1NO + 1NC


UL technical data

Rated operational voltage AC (UL) V 600

Dimensions

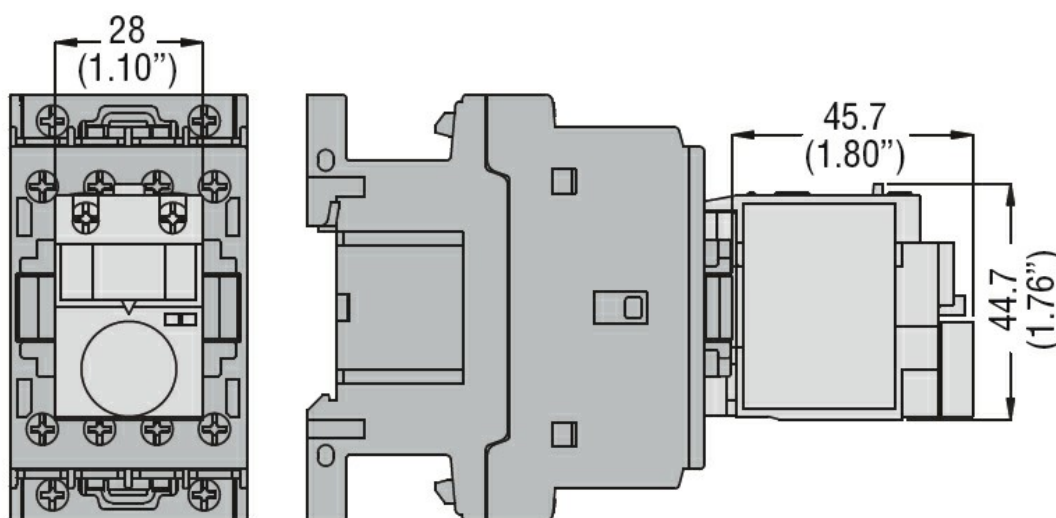

Wiring diagrams

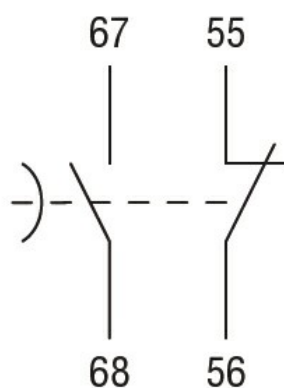

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates	
	CCC
	CSA
	cURus
	EAC
ETIM classification	
ETIM 8.0	EC002498 - Accessories/spare parts for low- voltage switch technology