



Auxiliary contact,  
1EB(NO) early-  
break operation  
with respect to  
poles of switch  
disconnecter  
GAX1110EA

## Product designation

## Product type designation

Number of poles

Nr. 1

## Contact characteristics

IEC Conventional free air thermal current I<sub>th</sub>

A 10

Mechanical life

cycles 100000

## Mechanical features

Fixing

Side mounting


Tightening torque for terminals

|  | max | Nm               | 0.8 |
|--|-----|------------------|-----|
|  | min | I <sub>bin</sub> | 7.1 |

Weight

g 35

## Dimensions

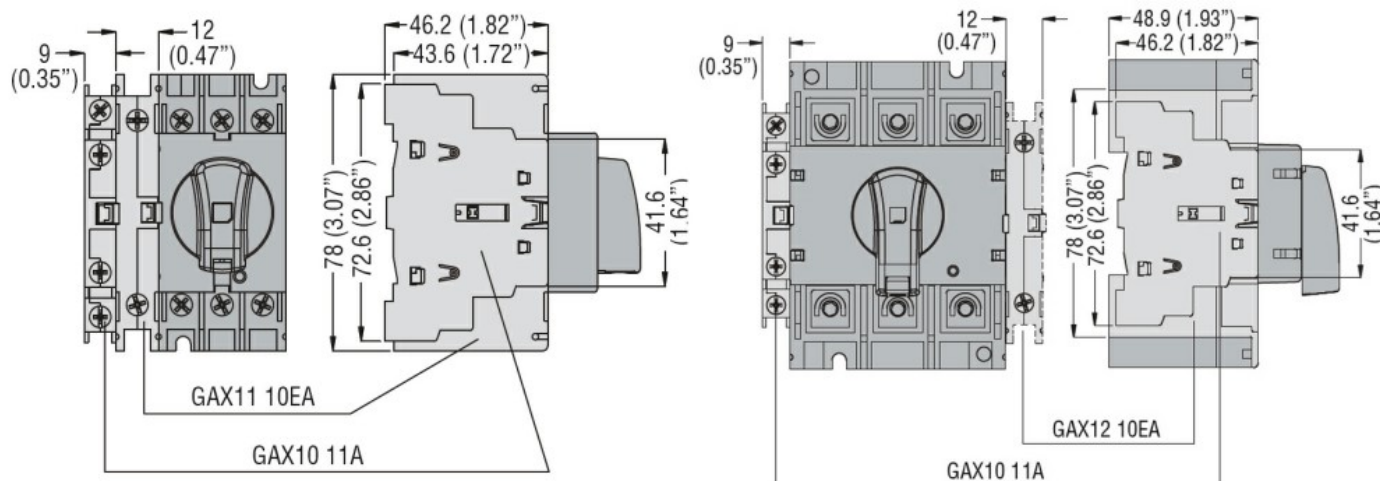

## Wiring diagrams

### GAX11... - GAX12...



## Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

Certifications

CCC

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

EAC

ETIM classification

ETIM 8.0

EC000041 -  
Auxiliary contact  
block