



USB interface,  
B/A female type  
connection  
LPCD0

## Product designation

## Product type designation

### General characteristics

|                          |                                   |
|--------------------------|-----------------------------------|
| Material                 | Polyamide                         |
| IEC degree of protection | IP65 on front and<br>IP20 on rear |

### Electrical characteristics

|                                       |    |         |
|---------------------------------------|----|---------|
| Rated insulation voltage $U_i$ IEC/EN | V  | 5VAC/DC |
| Contact resistance                    | mΩ | ≤30     |

### Mechanical features

|        |   |    |
|--------|---|----|
| Weight | g | 18 |
|--------|---|----|

### UL technical data

|                         |                                      |
|-------------------------|--------------------------------------|
| UL degree of protection | 1, 2, 3R, 4, 4X,<br>12, 12K on front |
|-------------------------|--------------------------------------|

### Ambient conditions

#### Temperature


#### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

#### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

### Dimensions

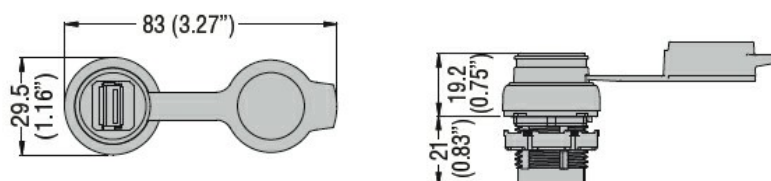

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

#### Certificates

cULus  
EAC

### ETIM classification

ETIM 8.0

EC000797 -  
USB-Hub