



Product designation

Product type designation

General characteristics

|                          |                                   |
|--------------------------|-----------------------------------|
| Colour                   | Black                             |
| Type of positions        | Mechanical reset flush pushbutton |
| Material                 | Polyamide                         |
| IEC degree of protection | IP66, IP67 and IP69K              |

Mechanical features

|                  |        |                          |
|------------------|--------|--------------------------|
| Operating force  | kg-lb  | <0.5Kg / 1.1lb           |
| Mechanical life  | cycles | 5000000                  |
| Fixing           |        | Without mounting adapter |
| Mounting adapter |        | LPXAU120                 |
| Weight           | g      | 28                       |

UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

Dimensions

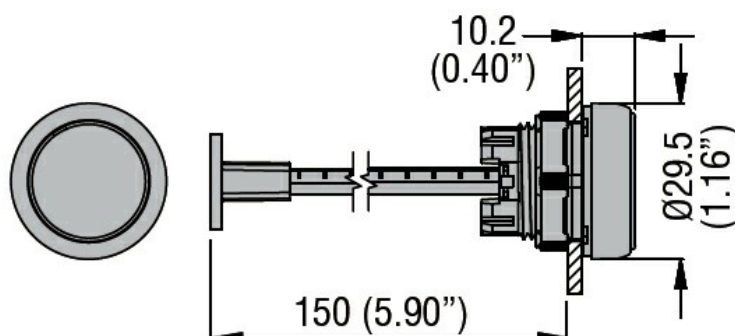

Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1

MECHANICAL RESET BUTTON, COMPLETE UNIT, SPRING RETURN Ø22MM PLATINUM  
SERIES CHROMED PLASTIC, FLUSH. ADJUSTABLE LENGTH 0...150MM/5.9IN, BLACK

|                     |                                                |
|---------------------|------------------------------------------------|
| Certificates        | IEC/EN/BS 60947-5-1                            |
|                     | UL508                                          |
|                     | CCC                                            |
|                     | cULus                                          |
|                     | EAC                                            |
| RINA                |                                                |
| ETIM classification |                                                |
| ETIM 8.0            | EC000221 -<br>Front element for<br>push button |