



Pilot light head  
LPFL

Product designation

Product type designation

### General characteristics

|                          |                                                                          |
|--------------------------|--------------------------------------------------------------------------|
| Colour                   | Red                                                                      |
| Material                 | Aluminium and zinc alloy for the metal part, polyamide for plastic parts |
| IEC degree of protection | IP66, IP67 and IP69K                                                     |

### Mechanical features

|                  |                          |
|------------------|--------------------------|
| Fixing           | Without mounting adapter |
| Mounting adapter | LPXAU120M                |


### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

### Ambient conditions

|                       |     |    |     |
|-----------------------|-----|----|-----|
| Temperature           |     |    |     |
| Operating temperature |     |    |     |
|                       | min | °C | -25 |
|                       | max | °C | +70 |
| Storage temperature   |     |    |     |
|                       | min | °C | -40 |
|                       | max | °C | +85 |

### Dimensions

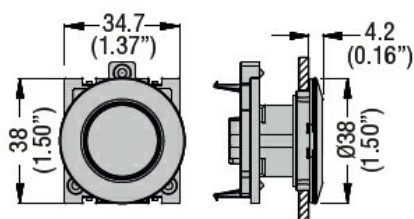

### Certifications and compliance

|              |                     |
|--------------|---------------------|
| Compliance   |                     |
|              | CSA C22.2 n° 14     |
|              | IEC/EN/BS 60947-1   |
|              | IEC/EN/BS 60947-5-1 |
|              | UL508               |
| Certificates |                     |
|              | cULus               |

### ETIM classification

ETIM 8.0

EC002024 -  
Accessories/spare  
parts for  
command  
devices