



Product designation
Product type designation

Joystick
LPSJ

General characteristics

Material	Aluminium and zinc alloy for metal parts and polyamide for plastic parts. Sealing boot is NBR rubber		
----------	--	--	--

IEC degree of protection	IP66		
--------------------------	------	--	--

Electrical characteristics

Rated insulation voltage Ui IEC/EN	V	690
IEC Conventional free air thermal current Ith	A	10
UL/CSA and IEC/EN 60947-5-1 designation	A300 Q300	
Operating current AC15		
	12V	A 6
	24V	A 6
	48V	A 6
	120V	A 6
	240V	A 3

Operating current DC13	12V	A	0.55
	24V	A	0.55
	48V	A	0.55
	125V	A	0.55
	250V	A	0.27

Contact resistance	mΩ	≤20	
--------------------	----	-----	--

Mechanical features

Mechanical life	cycles	1000000	
Tightening torque for terminals max	Nm	1	

Terminals screw	Clamp screw with washer		
-----------------	-------------------------	--	--

Mounting adapter	Included with contacts		
------------------	------------------------	--	--


UL technical data

UL degree of protection	Type 1, 2, 3R, 4, 4X, 12, 12K		
-------------------------	-------------------------------	--	--

Ambient conditions

Temperature		Operating temperature		
		min	°C	-25
		max	°C	+60
		Storage temperature		
		min	°C	-40
		max	°C	+70

Dimensions

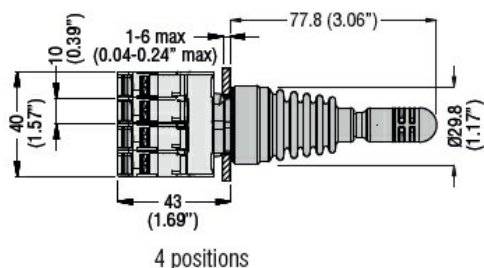

4 positions

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000632 -
Control switch,
Joystick