

SAFEGATE MA L2P TRX

Order Code: **1390804**

Set of Muting Arms. L-Logic (Exit Only). 2 Parallel Beams

Max. range (m)

3.5

Functioning system

TRX (Transceiver)



Technical Description

Parallel beams Muting arms with 2 retro-reflective sensors

Can be used in conjunction with Safegate access control barriers to create a one-way access control system with exit-only L-Muting logic

What's in the box: 2 Muting arms (active and passive elements) with pre-wired and pre-aligned Muting sensors, screws and fixing brackets

Features

Max. range (m)	3.5
Functioning system	TRX (Transceiver)
Operating temperature (°C)	- 30 ... 55
Muting logic	L (One way) logic with 2 parallel beams
Muting sensor field	Adjustable height and tilting
Characteristic output of Muting	PNP 100 mA at 24 VDC

sensors


Muting sensors	2 optoelectronic for glass application, built-in, pre-aligned and pre-wired with parallel beams
Integrated optoelectronic sensors	2 with parallel beams
Detection	Access control
Packaging dimensions HxLxW (mm)	145 x 430 x 200
Product class	A
Custom tariff	85389099

Electrical data

Mechanical data

Fastening	Back slot, side slot with set of LL type brackets (included). SFB SG swivel brackets (optional)
Gross weight (g)	1873,86

Technical drawings

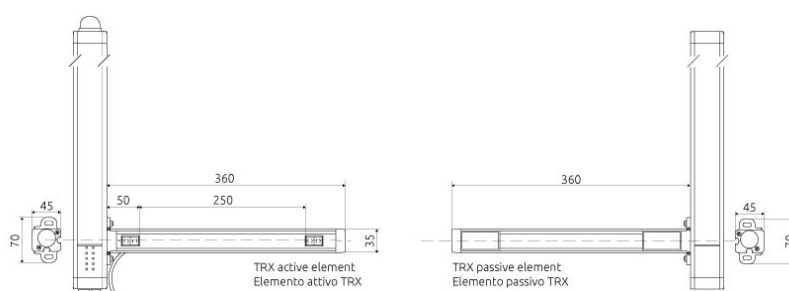

Certificates

