

SAFEGATE MA T2X

Order Code: **1390802**

Set of Muting Arms. T-Logic (Entry-Exit). 2 Crossed Beams



Max. range (m)

2.5

Functioning system

Emitter / Receiver

Technical Description

Crossed beams Muting arms with 2 through-beam sensors

Can be used in conjunction with Safegate access control barriers to create a two-way access control system with entry-exit T-Muting logic

What's in the box: 4 Muting arms (emitter and receiver) with pre-wired and pre-aligned Muting sensors, screws and fixing brackets

Features

Max. range (m)	2.5
Functioning system	Emitter / Receiver
Operating temperature (°C)	- 30 ... 55
Muting logic	L (One way) logic with 2 sensors - Parallel beams
Muting sensor field	Adjustable height and tilting
Characteristic output of Muting	PNP 100 mA at 24 VDC

sensors

Muting sensors	Emitter and receiver arms
Integrated optoelectronic sensors	2 with crossed beams

Detection	Access control
-----------	----------------

Packaging dimensions HxLxW (mm)	145 x 690 x 200
------------------------------------	-----------------

Product class	A
---------------	---


Custom tariff	85389099
---------------	----------

Electrical data

Mechanical data

Fastening	Back slot, side slot with set of LL type brackets (included). SFB SG swivel brackets (optional)
Gross weight (g)	2982,46

Technical drawings

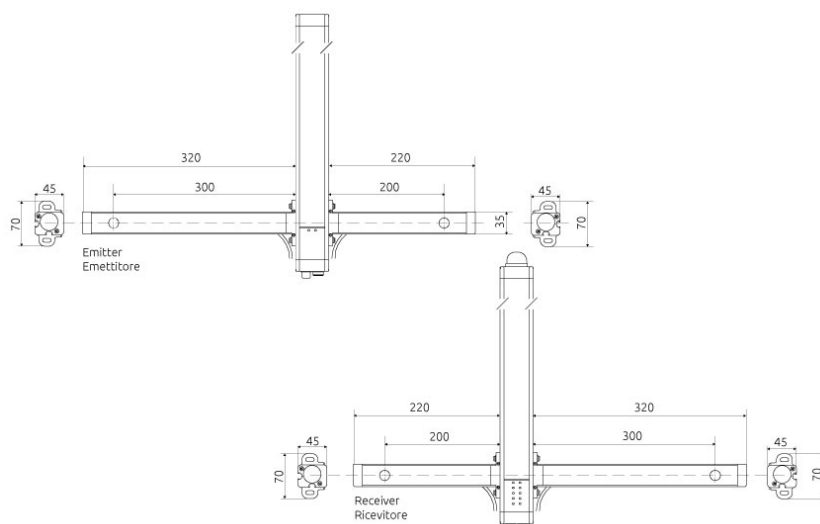

Certificates

