REER Your future's safe!

16 / 04 / 2025

SAFEGATE MA T4P TRX

Order Code: **1390805**

Set of Muting Arms. T-Logic (Entry-Exit). 4 Parallel Beams

Max. range (m)
3.5

Functioning system
TRX (Transceiver)

Technical Description

Parallel beams Muting arms with 4 retro-reflective sensors
Can be used in conjunction with Safegate access control barriers to create a two-way access control system with entry-exit T-Muting logic
What's in the box: 4 Muting arms (active and passive elements) with pre-wired and pre-aligned Muting sensors, screws and fixing brackets

Features

Max. range (m)	3.5
Functioning system	TRX (Transceiver)
Operating temperature (°C)	- 30 ... 55
Muting logic	T (Two way) Logic with 4 parallel beams
Muting sensor field	Adjustable height and tilting
Characteristic output of Muting sensors	PNP 100 mA at 24 VDC
Muting sensors	TRX Muting sensors arms with active and passive retro-reflector element
Integrated optoelectronic sensors	4 with parallel beams
Detection	Access control
Packaging dimensions HxLxW (mm)	145 x 870 x 200
Product class	A
Custom tariff	85389099

Electrical data

Mechanical data

Fastening	Back slot, side slot with set of LL type brackets (included). SFB SG swivel brackets (optional)
Gross weight (g)	3732,26

Technical drawings

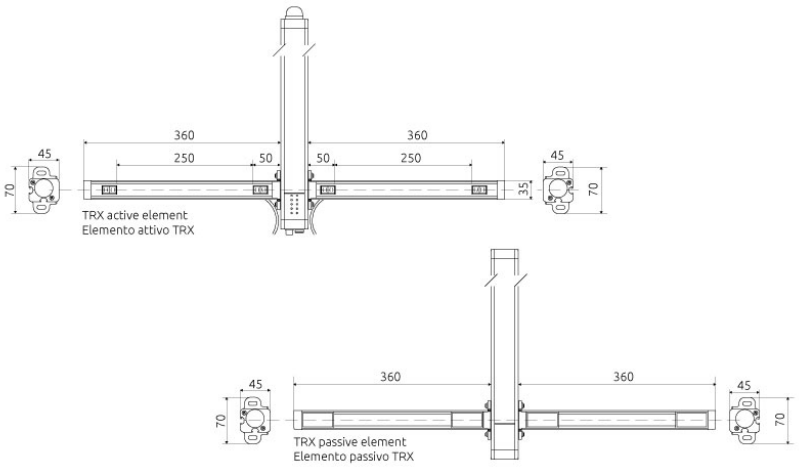

Certificates