


SAFEGATE MZ L2XP

Order Code: 1390808

Set of Muting Brackets with 2 M5 Sensors. L-Logic (Exit Only). Crossed or Parallel Beams

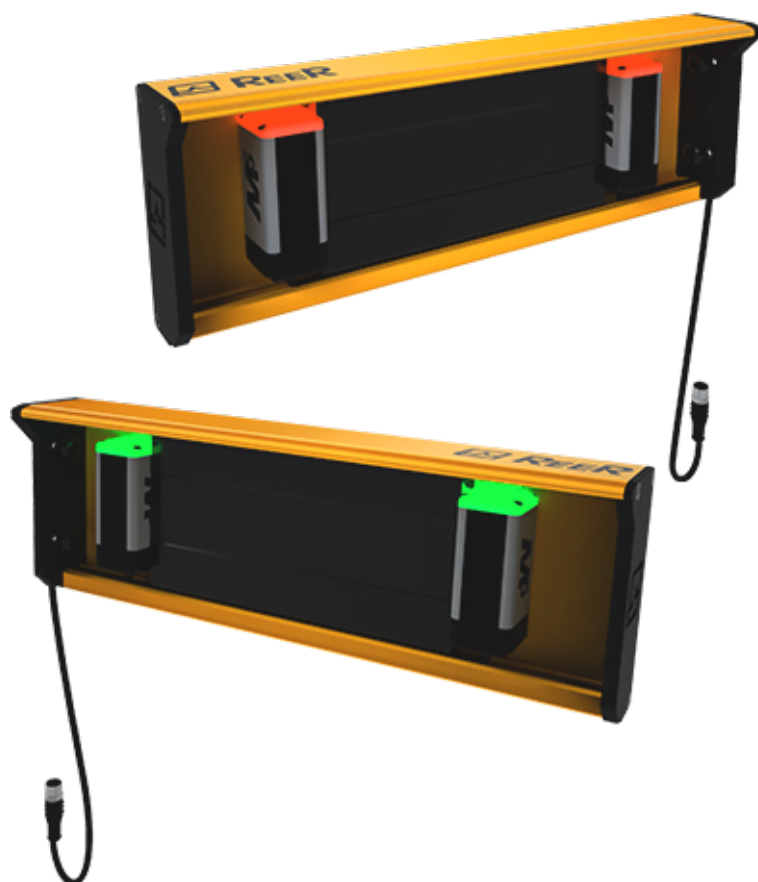

Max. range (m)

3.5

Functioning system

Emitter / Receiver

Technical Description

Crossed or parallel beams Muting brackets with 2 M5 multi-beam photocells

Can be used in conjunction with Safegate access control barriers to create a one-way access control system with exit-only L-Muting logic

What's in the box: 2 Muting brackets with 2 M5 multi-beam photocells (emitter and receiver), screws and fixing brackets

Features

Max. range (m)	3.5
Functioning system	Emitter / Receiver
Operating temperature (°C)	- 30 ... 55
Muting logic	L (One way) logic with 2 sensors - Crossed or parallel beams
Muting sensor field	Adjustable height and horizontal and vertical tilting
Characteristic output of Muting	PNP 100 mA at 24 VDC

sensors

Muting sensors	Brackets for 2 multibeam Muting sensors M5
Integrated optoelectronic sensors	2 multibeam M5 with crossed or parallel beams
Detection	Access control
Packaging dimensions HxLxW	145 x 450 x 200

(mm)


Product class	A
Custom tariff	85389099

Electrical data

Mechanical data

Fastening	Back slot, side slot with set of LL type brackets (included). SFB SG swivel brackets (optional)
Gross weight (g)	2305

Technical drawings

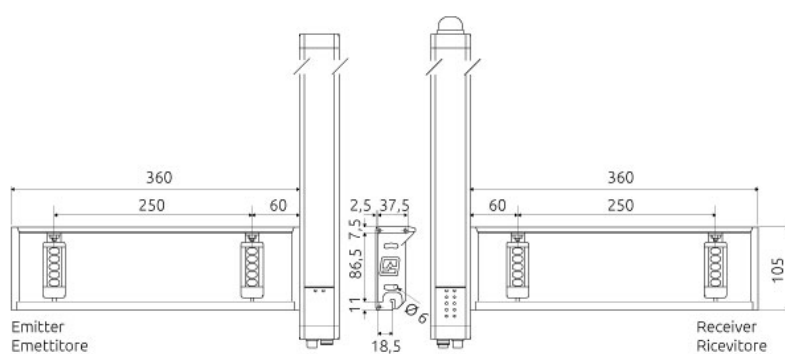

Certificates

