


KM30 LONG SENSING SERIES

ARTICLE PROPERTIES

SENSOR TYPE	Capacitive sensor
SIZE	M30x1.5
RATED OPERATING DISTANCE	See table
NUMBER OF CONDUCTORS	3-wire / 4-wire (see table)

CONNECTION TYPES (see table)

- Cable PVC, 0.34 mm², 2 m**
- M12 connector, A-coded



** Other cable lengths are available on request

MECHANICAL DATA

MOUNTING (mounting nuts included in delivery)	Flush / non-flush (see table)
HOUSING	Threaded cylindrical
MATERIAL HOUSING	Stainless steel
MATERIAL SENSING SURFACE	PBT
TIGHTENING TORQUE	100 N·m
LOCKING	
STANDARD TEST	FE360

ELECTRICAL DATA

OPERATING VOLTAGE	DC: 10 ... 30 V DC
RATED OPERATING CURRENT	3-wire: ≤ 200 mA 4-wire: ≤ 200 mA
SWITCHING FREQUENCY	See table
SWITCHING OUTPUT	See table
FUNCTION INDICATOR	Yellow LED
HYSTERESIS	3 ... 15 %
TEMPERATURE DRIFT	±10 %
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD RESISTANCE	Yes
REVERSE POLARITY PROTECTION	Yes

ENVIRONMENTAL CONDITIONS

PROTECTION CLASS	IP67	VIBRATION RESISTANCE (EN 60068-2-6)	10 ... 55 Hz, 1 mm
AMBIENT TEMPERATURE	-25 ... +70 °C	SHOCK RESISTANCE (EN 60068-2-27)	30 g, 11 ms

STANDARDS AND DIRECTIVES

EMC DIRECTIVE 2014/30/EU	EN IEC 60947-5-2
ROHS DIRECTIVE 2011/65/EU	EN IEC 63000

APPROVALS



KM30 LONG SENSING SERIES

DC 3-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
FC15-KM30-OP6L	flush	15 mm	PNP NO (WD5)	10 Hz	see Fig. 1
FC15-KM30-ON6L	flush	15 mm	NPN NO (WD6)	10 Hz	see Fig. 1
FC15-KM30-CP6L	flush	15 mm	PNP NC (WD7)	10 Hz	see Fig. 1
FC15-KM30-CN6L	flush	15 mm	NPN NC (WD8)	10 Hz	see Fig. 1
NC22-KM30-OP6L	non-flush	22 mm	PNP NO (WD5)	10 Hz	see Fig. 2
NC22-KM30-ON6L	non-flush	22 mm	NPN NO (WD6)	10 Hz	see Fig. 2
NC22-KM30-CP6L	non-flush	22 mm	PNP NC (WD7)	10 Hz	see Fig. 2
NC22-KM30-CN6L	non-flush	22 mm	NPN NC (WD8)	10 Hz	see Fig. 2

DC 3-WIRE OUTPUT M12 CONNECTOR

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
FC15-KM30-OP6L-Q12	flush	15 mm	PNP NO (WD5)	10 Hz	see Fig. 3
FC15-KM30-ON6L-Q12	flush	15 mm	NPN NO (WD6)	10 Hz	see Fig. 3
FC15-KM30-CP6L-Q12	flush	15 mm	PNP NC (WD7)	10 Hz	see Fig. 3
FC15-KM30-CN6L-Q12	flush	15 mm	NPN NC (WD8)	10 Hz	see Fig. 3
NC22-KM30-OP6L-Q12	non-flush	22 mm	PNP NO (WD5)	10 Hz	see Fig. 4
NC22-KM30-ON6L-Q12	non-flush	22 mm	NPN NO (WD6)	10 Hz	see Fig. 4
NC22-KM30-CP6L-Q12	non-flush	22 mm	PNP NC (WD7)	10 Hz	see Fig. 4
NC22-KM30-CN6L-Q12	non-flush	22 mm	NPN NC (WD8)	10 Hz	see Fig. 4

DC 4-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
FC15-KM30-BP6L	flush	15 mm	PNP NO+NC (WD9)	10 Hz	see Fig. 1
FC15-KM30-BN6L	flush	15 mm	NPN NO+NC (WD10)	10 Hz	see Fig. 1
NC22-KM30-BP6L	non-flush	22 mm	PNP NO+NC (WD9)	10 Hz	see Fig. 2
NC22-KM30-BN6L	non-flush	22 mm	NPN NO+NC (WD10)	10 Hz	see Fig. 2

DC 4-WIRE OUTPUT M12 CONNECTOR

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
FC15-KM30-BP6L-Q12	flush	15 mm	PNP NO+NC (WD9)	10 Hz	see Fig. 3
FC15-KM30-BN6L-Q12	flush	15 mm	NPN NO+NC (WD10)	10 Hz	see Fig. 3
NC22-KM30-BP6L-Q12	non-flush	22 mm	PNP NO+NC (WD9)	10 Hz	see Fig. 4
NC22-KM30-BN6L-Q12	non-flush	22 mm	NPN NO+NC (WD10)	10 Hz	see Fig. 4

KM30 LONG SENSING SERIES

DIMENSIONS

Fig. 1 Capacitive sensor with cable (flush)

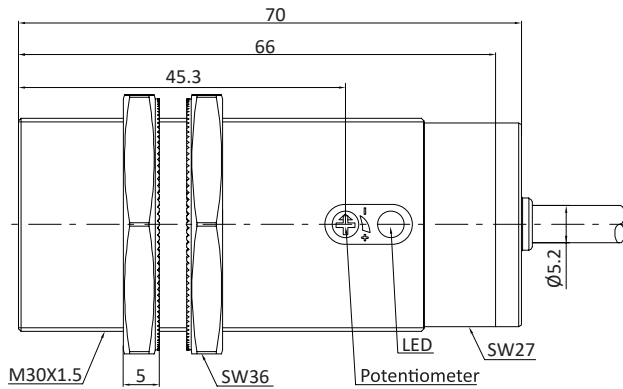


Fig. 2 Capacitive sensor with cable (non-flush)

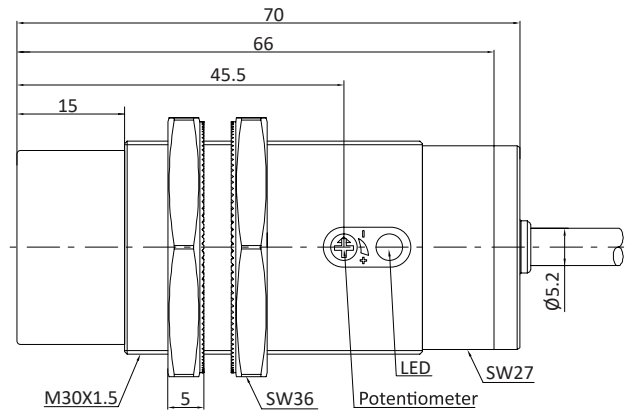


Fig. 3 Capacitive sensor with M12 connector (flush)


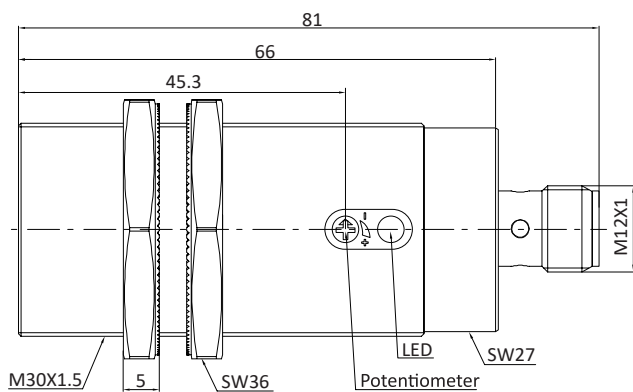



Fig. 4 Capacitive sensor with M12 connector (non-flush)

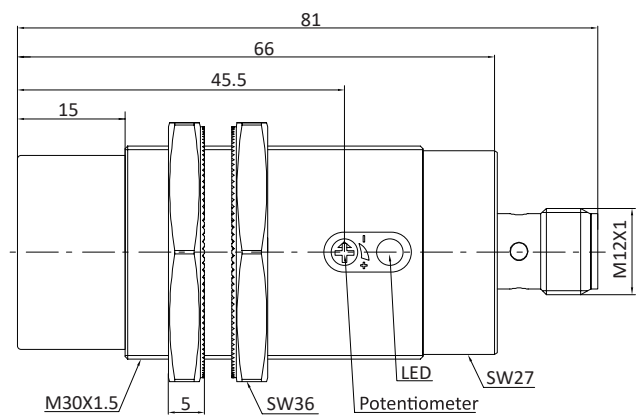


KM30 LONG SENSING SERIES

WIRING DIAGRAMS (Note: 1 / 2 / 3 / 4 connector and terminals pin number Bn / Bu / Wh / Bk cable color)


WD1 DC 2-wire NO




WD2 DC 2-wire NC




WD3 AC 2-wire NO




WD4 AC 2-wire NC




WD5 DC 3-wire PNP NO




WD6 DC 3-wire NPN NO




WD7 DC 3-wire PNP NC




WD8 DC 3-wire NPN NC



WD9 DC 4-wire PNP NO + NC

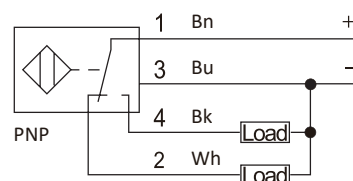

WD10 DC 4-wire NPN NO + NC



KM30 LONG SENSING SERIES

SALES AND SERVICE

Tianjin Elco Automation Co., Ltd

No. 12, 4th XEDA Branch Road
Xiqing Economic-Technological Development Area
Tianjin 300385, P.R. China
Office Phone: 022 23788282
E-Mail: info@elco.cn
www.elco-holding.com.cn

Elco Industrie Automation GmbH

Benzstrasse 7
71720 Oberstenfeld,
Deutschland
Office Phone: +49 7062 / 6599-260
E-Mail: info@elco-automation.de
www.elco-automation.de

Elco Automation LLC

1097 Highway 101 South, Suite D-3 Greer
South Carolina 29651, USA
Office Phone: +1 864-581-7431
E-Mail: infousa@elcoautomation.com
www.elcoautomation.com

Elco Industrial Automation Pvt Ltd.

No 80, 1st Main, 2nd Cross, Royal Enclave,
Sidedahalli, Nagasandra Bangalore 560073, India
Office Phone: +91-7259931777
E-Mail: info@elcoautomation.in
www.elcoautomation.com

Elco Automation Korea Ltd.

706, 17 Daehak 4-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, Republic of Korea, 16226
Office Phone: +82-31-216-7890
E-Mail: sales@elcoautomation.co.kr
www.elcoautomation.com