

SR ZERO

Order Code: 1330801

Safety Interface for devices with integrated feedback input for EDM. 2 NO + 1 NC. Screw. Screw terminal Blocks



Safety level

PL e

Safety relay outputs

2 NO + 1 NC (6A at 250 VAC)

Technical Description

Safety relay modules for safety light curtains with feedback input for EDM, such as EOS4X, Admiral AX, etc.

With forcibly guided contact safety relays, 2 NO + 1 NC<P>The additional NC contact line for monitoring by light curtain (EDM)

Features

Safety level	PL e
Safety level (SIL / PL)	PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	
Signalling	LEDs indication for input status
Connections	Removable terminal blocks, screw contacts
MTTFD (ISO13849) years	The values depend on the type of use. Refer to the technical manual
Safety devices to be connected	Safety devices with feedback input for external relay monitor (EDM), such as EOS4 X , EOS2 X, Admiral AX, Vision VX/VXL/MXL and Janus
Safety relay outputs	2 NO + 1 NC (6A at 250 VAC)
Product class	A


Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data

Dimensions HxWxD (mm)	99 x 22,5 x 114,5
Degree of protection	IP2X
Fastening	35 mm DIN rail fastening according to EN 50022-35 standard

Technical drawings

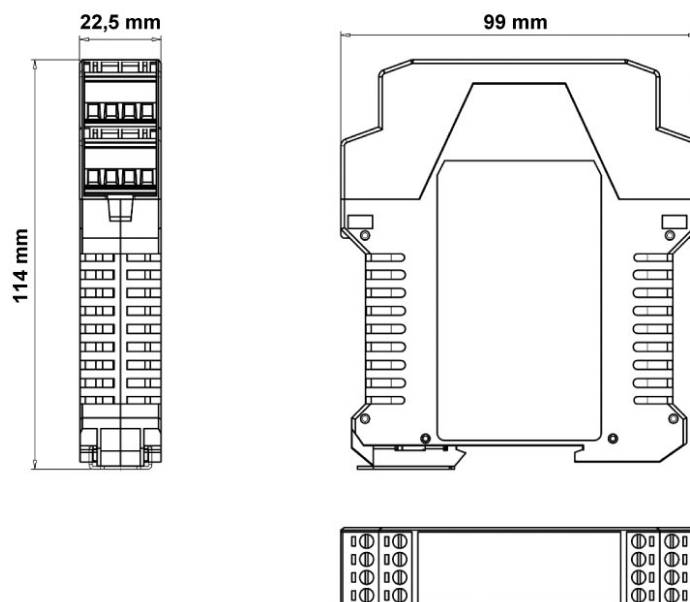

Certificates

