


Narrow & Wide Slotted Ducting

High impact, self-extinguishing, warp-proof rigid PVC

Keep it together the EZI way

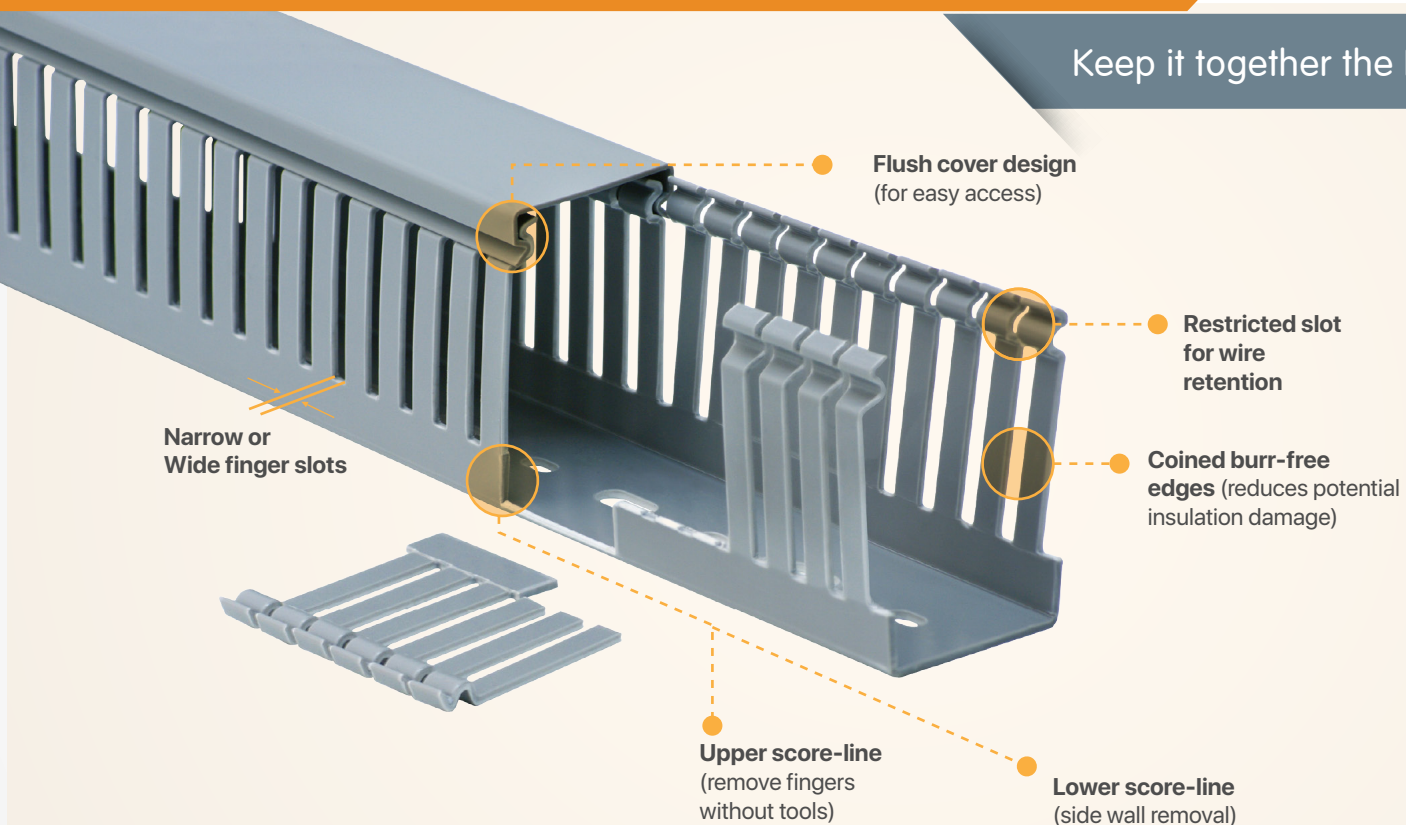

Quick and easy to install

Simple open/close design for easy access to wiring.

Enhances aesthetics and clarity

Duct and cover form a flush sidewall to provide increased capacity.

Provides complete electrical insulation

UL94 flammability rating for excellent flame retardation.



Free Call: 1800 252 995

Email: sales@mechtrics.com.au

Scan the QR or visit www.mechtrics.com.au

MECHTRIC



Slotted cable ducting

The **Ezi Canal slotted cable ducting** range offers a robust and professional solution for wire management in control panels. Designed to meet demanding requirements from small panels to large integrated systems this trunking provides effective support and simplifies wiring.

Manufactured from a **high impact, self extinguishing, and warp proof rigid PVC**, the ducting provides a shock proof, insulated solution that is resistant to acids, oils, and grease.

Key design features focus on ease of use and safety. An improved **easy to open** cover allows simple access, while a restricted slot design retains wires during installation. Double score lines permit the easy removal of individual fingers or the entire sidewall without tools.

Furthermore, a coining process ensures all edges are **burr free**, protecting both a technician's hands and cable insulation from abrasion.

General features:

- Simple open/close cover design for easy access to wiring in control panel
- Double score-line permits finger/slot or complete sidewall removal
- Coining process for burr-free edges to protect hands and wiring from abrasion
- Restricted slot design retains wire within slot for fast, easy wire installation or removal
- Duct and cover form a flush sidewall to provide increased capacity and improved appearance
- UL94 flammability rating V-0 for excellent flame retardation

Standard colour:

Grey - others available on request (*volume dependant*)

Standard length:

Supplied in two meter lengths, complete with covers

type	dimensions (mm) (W) (H)	colour	description	slot A (mm)	finger B (mm)	carton qty (L - 2 m)
------	----------------------------	--------	-------------	-------------------	---------------------	----------------------------

Slotted cable ducting (trunking)

Narrow slotted cable ducting Finger: 6 mm / Slot - 4 mm (10 mm pitch)

- Narrow slot/finger design to closely fit spacing of high density terminal blocks and I/O modules

TSL025025N/B	25	25	grey	PVC slotted cable ducting	4	6	48
TSL025040N/B	25	40	grey	PVC slotted cable ducting	4	6	40
TSL040040N/B	40	40	grey	PVC slotted cable ducting	4	6	24
TSL060040N/B	60	40	grey	PVC slotted cable ducting	4	6	24
TSL080040N/B	80	40	grey	PVC slotted cable ducting	4	6	18
TSL025060N/B	25	60	grey	PVC slotted cable ducting	4	6	30
TSL040060N/B	40	60	grey	PVC slotted cable ducting	4	6	28
TSL060060N/B	60	60	grey	PVC slotted cable ducting	4	6	18
TSL080060N/B	80	60	grey	PVC slotted cable ducting	4	6	14
TSL100060N/B	100	60	grey	PVC slotted cable ducting	4	6	12
TSL025080N/B	25	80	grey	PVC slotted cable ducting	4	6	28
TSL040080N/B	40	80	grey	PVC slotted cable ducting	4	6	20
TSL060080N/B	60	80	grey	PVC slotted cable ducting	4	6	12
TSL080080N/B	80	80	grey	PVC slotted cable ducting	4	6	8
TSL100080N/B	100	80	grey	PVC slotted cable ducting	4	6	8
TSL040100N/B	40	100	grey	PVC slotted cable ducting	4	6	16
TSL060100N/B	60	100	grey	PVC slotted cable ducting	4	6	12
TSL080100N/B	80	100	grey	PVC slotted cable ducting	4	6	8
TSL100100N/B	100	100	grey	PVC slotted cable ducting	4	6	8

Wide slotted cable ducting Finger: 12 mm / Slot - 8 mm (20 mm pitch)

TSL040060W/B	40	60	grey	PVC slotted cable ducting	8	12	28
TSL060060W/B	60	60	grey	PVC slotted cable ducting	8	12	18
TSL080060W/B	80	60	grey	PVC slotted cable ducting	8	12	14
TSL040080W/B	40	80	grey	PVC slotted cable ducting	8	12	20
TSL060080W/B	60	80	grey	PVC slotted cable ducting	8	12	12
TSL080080W/B	80	80	grey	PVC slotted cable ducting	8	12	8
TSL100080W/B	100	80	grey	PVC slotted cable ducting	8	12	8
TSL040100W/B	40	100	grey	PVC slotted cable ducting	8	12	16
TSL080100W/B	80	100	grey	PVC slotted cable ducting	8	12	8
TSL100100W/B	100	100	grey	PVC slotted cable ducting	8	12	8

Spare covers for above narrow and wide slotted cable ducting

TSM025/B	25	—	grey	spare PVC ducting covers	—	—	80
TSM040/B	40	—	grey	spare PVC ducting covers	—	—	80
TSM060/B	60	—	grey	spare PVC ducting covers	—	—	80
TSM080/B	80	—	grey	spare PVC ducting covers	—	—	80
TSM100/B	100	—	grey	spare PVC ducting covers	—	—	68