

INDUSTRIAL SIGNALLING

Flashing and Static Beacons




B200LDA



- LED static beacon
- Multi-voltage
- IP65

Specifications:

Light intensity:	5.5cd
Protection:	IP65
Duty:	Continuous
Temp rating (°C):	-25 to +50
Cable entry:	through base 8mm grommet
Construction:	Polycarbonate base and lens
Weight:	78g

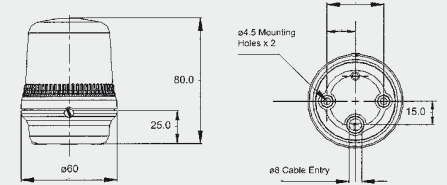

Dimensions in mm

Order Code	Voltage	Current
ESSB200LDA030B*	10-30VDC	80mA
ESSB200LDA230B*	90-240VAC	32mA

*Specify colour A = Amber, B = Blue, C = Clear, G = Green, R = Red, Y = Yellow


B300LDA



- LED multifunction beacon
- 9 flash patterns
- 2 stage alarm , remotely selectable (10-50VDC version only)
- Multi-voltage
- IP65

Specifications:

Light intensity:	19cd
Protection:	IP65
Duty:	Continuous
Temp rating (°C):	-25 to +50
Cable entry:	M20 side entry
Construction:	Polycarbonate base and lens
Weight:	370g

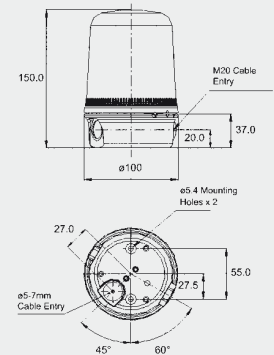

Dimensions in mm

Flash Patterns	
Stage 1	Stage 2 (10-50VDC only)
Static	Alternate side flash 2Hz
Rotating Slow 1	Alternate side flash 2Hz
Single Flash 2Hz	Rotating Fast 2
Rotating Fast 1	Single Flash 2Hz
Rotating Slow 2	Double Flash 1Hz
Double Flash 1Hz	Rotating Fast 2
Rotating Fast 2	Double Flash 2Hz
Double Flash 2Hz	Alternate side flash 2Hz
Alternate side flash 2Hz	Rotating Fast 2

Order Code	Voltage	Current
ESSB300LDA050B*	10-50VDC	130mA (24VDC)
ESSB300LDA230B*	90-240VAC	90 - 50mA

*Specify colour A = Amber, B = Blue, C = Clear, G = Green, R = Red, Y = Yellow

Accessories and Spare Parts

B200 wall mount



B300 wall mount



Order Code	Description
ESSB200RAB001	B200 wall mount bracket
ESSB200TMA001	B200 tube mount (140mm high)
ESSB300RAB001	B300 wall mount bracket
ESSB300TMA001	B300 tube mount (137mm high)
ESS9B200S*	B200 lens (*Specify colour)
ESS9B300S*	B300 lens (*Specify colour)

B200 tube mount



B300 tube mount

