

B450

- Traffic control, for loading bays, doors and gates
- Filament or LED bulbs, and LED array versions
- Supplied as individual units or in sets of 2 or 3
- Customised control options available
- IP65



Specifications:

Protection:	IP65
Duty:	Continuous
Temp rating (°C):	-25 to +50
Cable entry:	2 x M20
Construction:	Polycarbonate (powder coated steel boxes)
Weight:	0.37kg (individual units)

Order Code	Voltage	Current
B450TLA – LED array 89cd(e)		
ESSB450TLA030B*	10-30VDC	130mA
ESSB450TLA230B*	90-230VAC	10-30mA
ESSB450B2TLA030B**	2 x 10-30VDC signals mounted on box	
ESSB450B2TLA230B**	2 x 90-230VAC signals mounted on box	
ESSB450B3TLA030B***	3 x 10-30VDC signals mounted on box	
ESSB450B3TLA230B***	3 x 90-230VAC signals mounted on box	

*Specify colour A = Amber, G = Green, R = Red (top to bottom)

B450TSB – filament or LED bulbs 32cd(e) E27 25W max**

ESSB450TSB250B*	12-240VAC/DC	25W max
ESSB450B2TSB250B**	2 x signals mounted on box	
ESSB450B3TSB250B***	3 x signals mounted on box	


B450TDB – filament 24cd(e) 2 x E14 15W max**

ESSB450TDB250B*	12-240VAC/DC	2 x 15W max
ESSB450B2TDB250B**	2 x signals mounted on box	
ESSB450B3TDB250B***	3 x signals mounted on box	

*Specify colour A = Amber, B = Blue, C = Clear, G = Green, R = Red (top to bottom)



**Bulbs must be ordered separately

Note: Box dimensions – 2 light 400h x 200w x 120d
3 light 500h x 200w x 120d

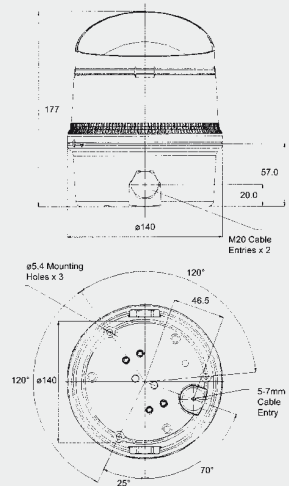

Dimensions in mm

Mounting Bracket

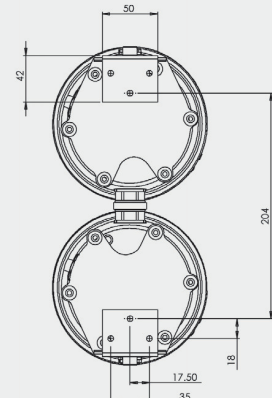

Accessories and Spare Parts

Order Code	Description
ESS9BMB450TS	Mounting bracket for single units
ESS9BMB450TM	Mounting bracket for multiple units
ESS9BGS***25C27	E27 Bulb 25W
ESS9B1015***	E14 Bulb 15W

*Specify voltage 024 = 24V, 110 = 110V, 240 = 240V