

C12



C12

- High output Amber beacon
- Permanent or magnetic mounting
- 10-30VDC
- 22 selectable flash patterns including five simulated rotating patterns
- Flash patterns externally selectable.
- Meets ECE R65 and SAE J845 Class 1



Order Code	Model	Mounting	Weight (kg)
79SS080402A	C12	3 point fixed	0.540
79SS080405A	C12	magnetic	1.460



C12M

Specifications:

Voltage: 10-30VDC
Light Source: 12 x 3W LED
Max Power: 19W
Flash rate: 22 flash patterns
Protection: IP67
Temp rating (°C): -20 to +65
LED Life: > 100,000 hours
Max. Vehicle Speed: 140km/h
 (magnetic mount versions)
Connection: 50cm 4 core cable
 (permanent mount)
 2.5m coiled cabled with lighter plug (plug includes on/off and flash selection switches)
Construction: ABS base, polycarbonate lens

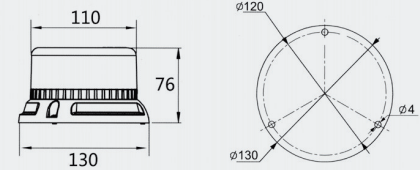

C24



C24

- High output Amber beacon
- Permanent or magnetic mounting
- 10-30VDC
- 22 selectable flash patterns including five simulated rotating patterns
- Flash patterns externally selectable.
- Meets ECE R65 and SAE J845 Class 1

Order Code	Model	Mounting	Weight (kg)
79SS080102A	C24	3 point fixed	0.650
79SS080106A	C24	magnetic	1.530



C24M

Specifications:

Voltage: 10-30VDC
Light Source: 24 x 3W LED
Max Power: 37W
Flash rate: 22 flash patterns
Protection: IP67
Temp rating (°C): -20 to +65
LED Life: > 100,000 hours
Max. Vehicle Speed: 140km/h
 (magnetic mount versions)
Connection: 50cm 4 core cable
 (permanent mount)
 2.5m coiled cabled with lighter plug (plug includes on/off and flash selection switches)
Construction: ABS base, polycarbonate lens

