

VEHICLE SIGNALLING

Xenon Beacons





RB Series



- 3 point or magnetic mounting
- Dual voltage 12/24V versions
- Multi-voltage versions for battery powered vehicles
- High efficiency
- Application – commercial vehicles, service vehicles, materials handling, and cleaning machines

Specifications:

Protection: IP65
 Temp rating (°C): -20 to +55
 Cable entry: Through base
 Construction: ABS base, polycarbonate lens
 Weight: 0.4Kg
 (0.82kg magnetic base version)

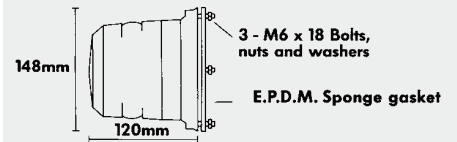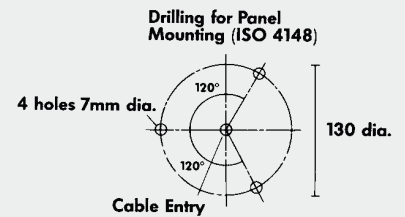

Order Code	Model	Voltage	Current	Flash Energy	Light Output	Flash Rate
DLR401206*	RB4XDV/6	10-32VDC	300-600mA	4J	>50Cd (e)	75fpm
DLR401206*MAG	RB4XDV/6MAG	10-32VDC	300-600mA			
DLR201215*	RB2XDV/15	10-33VDC	0.75-1.5A	6.0 J	>60Cd (e)	125fpm
DLR401002*	RB4XMV/2P#	10-100VDC 30-60VAC	145-40mA	1.5 J	>18Cd (e)	75fpm
DLR401005*	RB4XMV/5	10-100VDC 30-60VAC	360-60mA	4.0 J	>44Cd (e)	75fpm

*Specify colour A = Amber, B = Blue, G = Green, R = Red

Available in Amber only

EL Series



- 3 point or magnetic mounting
- Dual voltage 12/24V versions
- High efficiency
- Double flash
- Application – commercial vehicles, service vehicles, and emergency vehicles

Order Code	Mounting	Weight (kg)
DLE201215A	3 point fixed	0.6

*Specify colour A = Amber, B = Blue, G = Greens, R = Red

Specifications:

Voltage: 10-33VDC
 Current: 1.5-0.75A
 Flash rate: 120 fpm
 Light output: >100Cd (e)
 Protection: IP65
 Temp rating (°C): -20 to +55
 Cable entry: Through base
 Construction: ABS base, Polycarbonate lens

