

H-962 Traffic Signal Light




- High output LED solar powered signal
- High visibility
- Unidirectional
- Pole mounting
- Operates day and night
- Maintenance free

Order Code	Light Colour	Weight (kg)
KAIH962R	Red	8
KAIH962Y	Yellow	8

Specifications:

Flash rate: 60fpm \pm 10
 Lamp type: 120 x 5mm high output LED
 Batteries: Sealed Lead-Acid
 Protection: IP65
 Temp range (°C): -10 to +55
 Construction: Powder coated aluminium alloy housing
 Mounting: Supplied with mounting brackets
 Weight: 8Kg

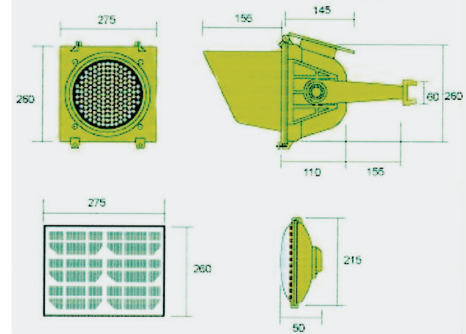

Dimensions in mm

H-932 Pavement Marker




- High output LED solar powered signal
- High visibility
- Bidirectional (except white versions)
- Operates at night only
- Maintenance free

Order Code	Light Colour/Direction	Weight (kg)
KAIH932WR	Red/Red	0.36
KAIH932WA	Yellow/yellow	0.36
KAIH932WAR	Yellow/Red	0.36
KAIH932SW	White (steady / flashing)	0.36
KAIH932BSW	White / (steady)	0.36

Specifications:

Flash rate: 300fpm \pm 60
 Lamp type: 3 x 5mm high output LED (in each direction, except white versions)
 Batteries: Ni-cd
 Autonomy: Up to 24 hours (dependent on length and strength of sunshine)
 Protection: IP66
 Temp range (°C): -10 to +55
 Construction: Aluminium and polycarbonate
 Mounting: Surface mount



Dimensions in mm