


Enclosure Heaters

- Available in 12 sizes from 15W to 750W
- 230V 50/60Hz power supply
- Operating temperature -45 to +70°C
- DIN rail mounting
- Thermal overcurrent protection

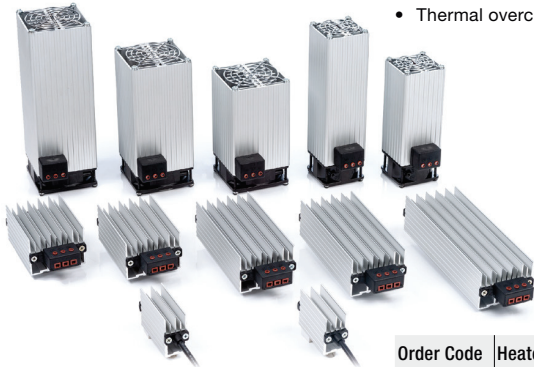

17MPHT... 17PHT... 17PFHT...

Order Code	Heater Type	Heating Power (W)	Dimensions (mm)	Max Current (A)	Wt (kg)
17MPHT15	PTC	15	60 x 50 x 27	2.0	0.11
17MPHT25	PTC	25	70 x 50 x 27	2.0	0.12
17PHT030	PTC	30	128 x 70 x 59	2.0	0.41
17PHT050	PTC	50	138 x 70 x 59	2.0	0.44
17PHT100	PTC	100	188 x 70 x 59	4.0	0.59
17PHT150	PTC	150	228 x 70 x 59	6.0	0.72
17PFHT250	Fan forced resistance	250	152 x 80 x 110	1.2	0.98
17PFHT500	Fan forced resistance	500	182 x 80 x 110	2.4	1.2
17PFHT750	Fan forced resistance	750	232 x 80 x 110	3.6A	1.45

Controllers

- Available with NO or NC contacts
- Bimetal sensor (polyamide sensor on 17PHG02)
- Operating temperature -45 to +80°C (-10 to +60°C on 17PHG02)
- DIN rail mounting
- No. of operations > 100.000
- Contact rating 10A (250VAC)



17PTHT 17PTVT



17PTHVT



17PHG02

Order Code	Type	Contact	Dimensions (mm)	Weight (kg)
17PTHT	Thermostat (Red) 0-60°C	1 x NC	61 x 34 x 38	0.045
17PTVT	Thermostat (Blue) 0-60°C	1 x NO	61 x 34 x 38	0.045
17PTHVT	Double thermostat (Red+ Blue) 0-60°C + 0-60°C	1 x NC + 1 x NO	65 x 59 x 42	0.080
17PHG02	Hygrostat 10-90%	1 x CO	105 x 60 x 55	0.180